



**PRODUCT
SPECIFICATION
SHEETS**

4 mil Non-Detectable Underground Warning Tape Material Specification Sheet

Application:	Used in construction, turf and irrigation, CATV, utilities, and by pipeline and mechanical contractors. The tape is buried 4" to 6" below the surface so that it is dug up prior to reaching a depth that could cause damage to the line or person(s) digging.	
Colors:	Blue, Green, Orange, Purple, Red, and Yellow all with Black Ink	
Material:	Polyethylene Film	
Thickness:	4 mil	
Roll Width:	3", 6", 12" or made to spec	
Length:	300', 1000', or made to spec	
Elongation:	MD: 400% TD: 500%	ASTM D-882 ASTM D-882
Packaging:	2" x 1,000' rolls 3" x 1,000' rolls 6" x 1,000' rolls	12 per case 8 per case 4 per case

Custom Print Available Upon Request
(Call for special pricing and availability)



6 mil Non-Detectable Underground Warning Tape Material Specification Sheet

Application:	Used in marking underground utilities. The tape is buried 4" to 6" below the surface so that it is dug up prior to reaching a depth that could cause damage to the line or person(s) digging.	
Colors:	Red, Orange, and Yellow with Black, Blue, Green, Orange, Red, Yellow or White Ink	
Material:	Polyethylene Film	
Thickness:	6 mil	
Roll Width:	3", 6", 12" or made to spec	
Length:	1000', 3000', 5000', 6000', or made to spec	
Elongation:	MD: 1050% (+/-10%) CD: 1158% (+/-10%)	ASTM D-882 ASTM D-882
Packaging:	2" x 1,000' rolls 6" x 1,000' rolls 12" x 1,000' rolls	8 per case 4 per case 2 per case

Custom Print Available Upon Request
(Call for special pricing and availability)



Aerial Paneling

For aerial mapping and surveying jobs, Presco Aerial Paneling can be easily placed along a predetermined perimeter of an area to be photographed. These reusable, 4 Mil PVC panels save time and labor costs in your aerial project.

Material

PVC

Gauge

4 Mil

Aerial Paneling

12" X 300' or 24" X 300'
Minimum Order: 1 roll

Material/Ink Colors

White/Black



Aerial Targets

Presco Aerial Targets can be secured at a predetermined point of reference to mark a target position for a fly-over. These stitched, 4 Mil PVC targets are manufactured with reinforced grommets in each corner, used to secure the marker to the ground

Material

PVC

Gauge

4 Mil

Aerial Targets

48" X 48"

Patterns Available:


Bulls-Eye

Iron Cross

Minimum Order: 1 target

Material Colors

White/Black

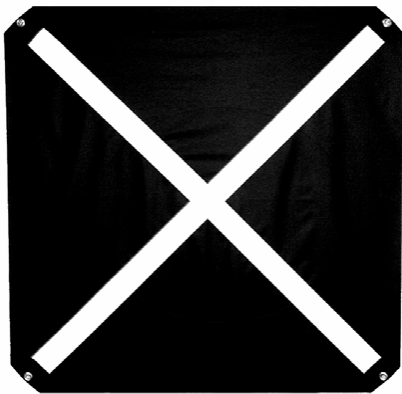

Aisle Marking Tape Material Specification Sheet

Description:	Presco long-lasting 6 Mil Aisle Marking Tape is perfect for a wide range of APWA color coding applications, including: lane marking, striping, sealing, decorating, OSHA required safety coding. It adheres firmly, yet removes easily from most surfaces.
Colors:	Black, White, Red, Blue, Green, Orange, Yellow
Thickness:	6 mil
Adhesive:	Natural Rubber Resin
Backing Material:	Vinyl Film
Roll Length:	36 yards



Arctic Roll Flagging Material Specification Sheet

Description:	Presco's Arctic Roll Flagging is a flexible PVC material that is specially formulated to improve the printability, cold temperature tolerance, weathering and minimize blocking.
Slit Width:	1.1875" (+/- 0.0625") Custom Widths Available
Length:	Standard Colors: 300 ft Glo Colors: 150 ft Custom Lengths Available
Thickness:	Standard Colors: 3.0 mil or 76.2 μm (+/- 10%) Glo Colors: 5.0 mil or 127 μm (+/- 10%)
Cold Crack:	-40° F (+/- 10) Fed. Std. 191 Method 5874
Surface Finish:	Coarse Matte
Print:	Legends printed with Flexo PVC inks Custom Colored Ink and Custom Legends Available



Barricade Tape Material Specification Sheet

Material:	Polyethylene Film
Color(s):	Orange, Red, ,Yellow, or special order
Gauge(s):	2, 3, 4, 6, & 7 mil (+/- 10%)
Roll Width(s):	3, 6, 12 inches or as per specifications
Footage(s):	300 and 1000 ft. or as per specifications



Biodegradable Roll Flagging/Barricade Tape Material Specification Sheet

Description:	Made of a non-woven cellulosic material derived from wood pulp, this product is completely non-toxic humans, animals, and the environment. Complete degradation will occur outdoors in six to twenty-four months dependant on enviromental and climatic conditions.
Colors:	Roll Flagging: Blue, White, Red Orange, and Yellow Barricade Tape: Red and Yellow
Thickness:	6 mil
Weight:	1.03 oz/y ²
Roll Width:	Roll Flagging - 1" Barricade Tape - 3"
Length:	Roll Flagging - 100' Barricade Tape - 150'



Coarse Matte Roll Flagging Material Specification Sheet

Description:	Coarse Matte roll flagging tape.	
Colors:	Orange Glo, Pink Glo, Blue Glo, Yellow Glo, and Red Glo	
Thickness:	2.2 mil (+/- 0.5 mil)	
Slit Width:	1.1875" Custom Widths Available	
Length:	150' Glo Colors Custom Lengths Available	
Core Size:	1 5/8" ID	
Roll Diameter:	3" approx.	
Cold Crack:	-20 °F	Fed Std 191



Detectable Underground Warning Tape Material Specification Sheet

Description: Detectable Underground Warning Tape is a specially laminated pet / foil / poly blend. This amazing blend (with polyester) provides exceptional strength characteristics when compared to other all polyethylene type detectable warning tapes. The bold black message on its APW.A color coded background is treated so as not to degrade or fade when exposed to alkalis, acids and or any other destructive elements under ground.

Construction: .0003" Aluminum Foil Laminated (Full Width) Between Polyester and Polyethylene Sheeting

Colors: Standard Colors:
Black text on APWA color
Coded Background Per Specification:
Orange, Red, Yellow, Blue, Purple, or Green

Thickness: 5 Mil

Slit Width: Standard widths: 2, 3, 4, 6, and 12 inches.

Length: Standard Roll Length: 1000 Feet



Edge Mark Roll Flagging Material Specification Sheet

Description:	Presco's Edge mark roll flagging tape is designed for use in the construction, survey, and hardware markets. Formulated specifically for economics and functionality.	
Colors:	Standard Colors: Blue, White, Red Orange, and Yellow Glo Colors: Orange, Pink, Red and Lime	
Thickness:	2.5 mil (+/- 0.5 mil)	
Slit Width:	1" (Custom Widths Available)	
Length:	200' (Custom Lengths Available)	
Cold Crack:	0° F	Fed Std 191



Forest Arctic Roll Flagging Material Specification Sheet

Description:	Presco's Forest Arctic Roll Flagging is a flexible PVC material that is specially formulated for long term outdoor placement in cold temperature environments to be used by professionals in the forestry industry		
Colors:	Standard Colors:	Red, Yellow, and White	
	Glo Colors:	Blue, Lime, Orange, Pink, Yellow	
Slit Width:	1"		
Length:	125 ft		
Thickness:	4.5 mil or 114.3 μm (+/-10%)		
Breaking Force:	9 lbf/in min.	ASTM D-882	
Cold Crack	-40°F (+/-10)	Fed. Std. 191 Method 5874	
Surface Finish	Coarse Matte		
Color Fastness:	Fluorescent Colors :	637 hours	ASTM G155
	Standard Colors :	800 hours	ASTM G155
Print:	Legends printed with Flexo PVC inks Custom Colored Ink and Custom Legends Available		



Hazard/Warning Striped Tape Material Specification Sheet

Description:	Presco Hazard/Warning Tape is a 6 Mil pressure sensitive PVC adhesive tape that is striped for high visibility. To decrease potential liability in high-risk injury areas, use the flexible tape to mark pillars, steps, walks, parking lots, lift gates, etc.
Colors:	White/Black, White/Red, Yellow/Black
Thickness:	6 mil
Material:	PVC adhesive tape
Roll Length:	2" x 18 yards 2" x 36 yards 3" x 18 yards (Yellow/Black)




Lead Hazard Barricade Tape Material Specification Sheet

Description:	Presco's Edge mark Lead Hazard barricade tape is designed for use in work areas with possibly dangerous zones. It is formulated specifically for economics and functionality.
Colors:	Material Color: White Ink Colors: Red and black
Thickness:	2 mil
Roll Width:	3 inches
Length:	1000 feet
Material:	Polyethylene Film
Quantity:	8 per case



Marking Flags Material Specification Sheet

Description:	Flexible PVC film for marking flags.
Colors:	Black, blue, brown, clear, green, orange, purple, red, silver, white, yellow, blue glo, green glo, lime glo, orange glo, pink glo, red glo, and yellow glo.
Gauge:	3.20 mill (+/-5%)
Impact Brittleness:	-40°F
Embossed Finish:	Suede/Matte
Flag Sizes:	2"x3", 4"x5", and 5"x8"
Length:	Wire: 15", 18", 21", 24", 30", 36" Plastic Staff: 18", 21", 24", 30" Fiberglass Staff: 18" and 24"
Printability:	All colors can be custom printed as per specification
Ink Colors:	Black, brown, light blues, dark blue, light green, dark green, orange, purple, red, silver, yellow, and white
Quantity:	Wire: 10 bundles of 100 flags per bundle 1000 flags per box Plastic: 20 bundles of 50 flags per bundle 1000 flags per box Fiberglass: 20 bundles of 50 flags per bundle 1000 flags per box

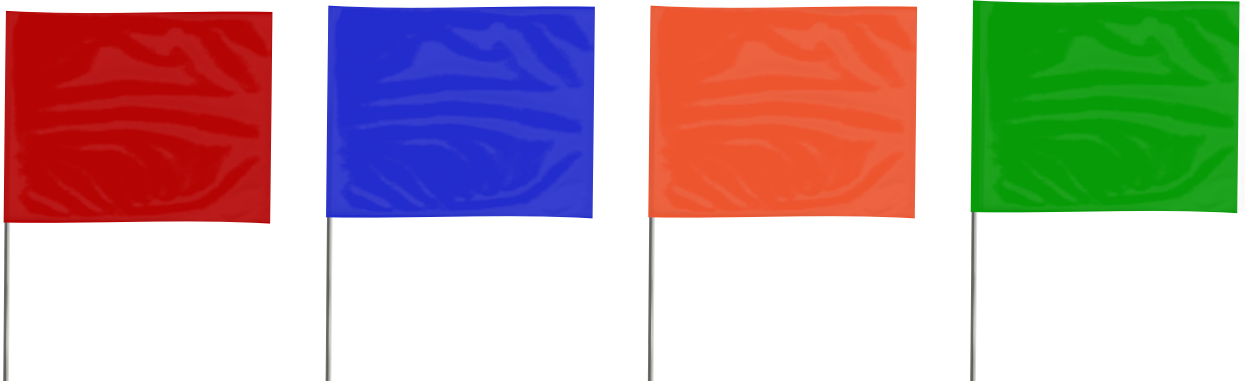

General Purpose Pennant Flags Material Specification Sheet

Material:	Flags: Polyethylene Rope: Double sewn with twine
Flag Thickness:	4 Mil
Flag Size:	9" x 12" triangles
Strand Length:	60' and 100' available
Colors:	Multi-colored strand Red Red/White Orange Orange/White Yellow



OSHA Compliant Pennant Flags Material Specification Sheet

Material:	Flags: Polyethylene Rope: Double sewn with a 6500/280 Polypropylen Twine
Tensile Strength:	500 lbs per OSHA requirement
Flag Thickness:	4 Mil
Flag Size:	12" x 18" triangles
Strand Length:	105"
Colors:	Red Yellow Multi-colored



Reinforced PE Barricade Tape Material Specification Sheet

Description:	Presco's Reinforced polyethylene is lead-free and specially formulated to improve printability, weather resistance, tensile strength and resistance to underground conditions.	
PE Thickness:	0.007" (+/- 10%)	
Colors:	Red, Orange, and Yellow	
Slit Width:	3" or 6" Custom Widths Available	
Length:	500' Custom Lengths Available	
Tensile Strength:	MD: 11411 psi (+/- 10%) CD: 11837 psi (+/- 10%)	ASTM D-882
Print:	Legends printed with Flexo PE inks Custom Colored Ink and Custom Legends Available	



Taffeta Glo Color Flagging Material Specification Sheet

Description:	Presco's PresGlo Taffeta Roll Flagging is a fluorescent, flexible PVC material that is formulated for endurance in outdoor surveying and marking applications.
Slit Width:	1.1875" (+/- 0.0625") & Custom widths available
Length:	150' & Custom lengths available
Thickness:	4.50 mil or 114.3 μm (+/- 10%)
Cold Crack:	-20° F (+/- 10) Fed Std. 191 Method 5874
Surface Finish:	Taffeta



Taffeta Standard Color Flagging Material Specification Sheet

Description:	Presco's Taffeta Roll Flagging is a flexible PVC material that is formulated for endurance in outdoor surveying and marking applications.
Slit Width:	1.1875" (+/- 0.0625") -Custom widths available
Length:	300' -Customs lengths Available
Cold Crack:	-20° F (+/- 10) Fed. Std. 191 Method 5874
Surface Finish:	Taffeta



Texas Roll Flagging Material Specification Sheet

Description:	Texas roll flagging tape.
Colors:	Standard Colors: Blue, Black, Green, Orange, Pink, Purple, Red, White, and Yellow Glo Colors: Green, Orange, Blue, Pink, Red, Yellow and Lime
Thickness:	Standard 2.0 mil (+/- 0.5 mil) Glo 3.0 mil (+/- 0.5 mil)
Slit Width:	1.1875" Custom Widths Available
Length:	300' Standard Colors 150' Glo Colors Custom Lengths Available
Core Size:	1 5/8" ID
Roll Diameter:	3" approx.
Cold Crack:	-20° F



Presco Triage Ribbon and Tape Material Specification Sheet

Ribbon Description:	Colorful and highly visible, Presco Triage Ribbon is the most durable and easy to use PVC triage ribbon available. For obvious reasons, our triage ribbon is non-toxic.
Material Finish:	Taffeta Grade Matte Grade (for printed ribbon only)
Roll Width	1 3/16" - Solid Colors 1 1/2" - Custom Print
Roll Length:	300' (Custom lengths available)
Tape Description:	Manufactured for durability and resistance to the elements, Presco Triage Tape is recognized worldwide as the preferred co-extruded (PE) polyethylene tape for marking emergency areas and special instructions. It is an economical and disposable emergency marking solution that exceeds all industry specifications.
Material Thickness:	3 and 4 mil
Roll Width:	3" (Custom widths available)
Roll Length:	1000' (Custom lengths available)
Presco Triage Colors:	Red, Yellow, Green, and Black (As per the S.T.A.R.T. Designated Color System referenced to Homeland Security Preparedness)
Presco Triage Available Legends:	IMMEDIATE, DELAYED, MINOR, DECEASED, COMMAND POST, PUBLIC INFORMATION AREA, HOT ZONE, WARM ZONE, COLD ZONE, TRIAGE AREA, STAGING AREA.



Woven Barricade Tape Material Specification Sheet

Description:	Presco Woven Barricade Tape is an extra durable polypropylene tape that offers a long lasting making solution for off-limit or hazardous areas and crowd control.
Colors:	Red, red with black stripes, and yellow with black stripes
Width:	2"
Tensile:	500#
Weight:	8.1 grams/yard
Length:	150' and 200'

